



- Floor Tile
- Glossy
- Matt
- Correct Rectified
- Digital
- Random
- Interior
- Commercial
- Domestic

NANO +
VITRIFIED
TILES

600x600mm

Nano Vitrified Tiles are sheltered with nano pores and a liquid layer of silica to make them smooth and shiny. We use high-quality decorative paper to produce elegant designs that let your area sparkle. Their compact size adds to their flexibility and appeal. These tiles are scratch-proof and crack-resistant that makes your space glow for long. Nano Vitrified Tiles comes with shiny textures, a variety of designs, colors and supreme finish. Moreover, we follow international standards for keeping our products class apart.




Serene

Bring out the best in your adobe with blissful impressions

NANO+
VITRIFIED
TILES

600x600mm

- Floor Tile
- Glossy
- Matt
- Correct Rectified
- Digital
- Random
- Interior
- Commercial
- Domestic



1001



1017




1020



1022



1045

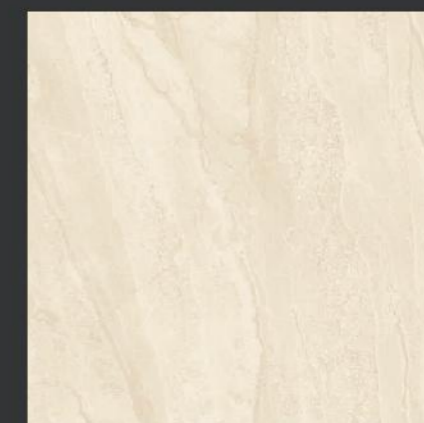

1048

Lavish

Let your decor tell its tale of style and poise effortlessly



1050




1053




1054



1061

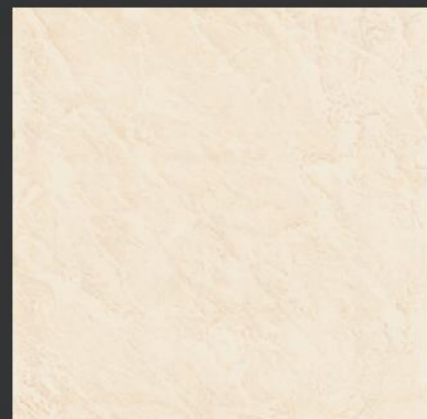

1062

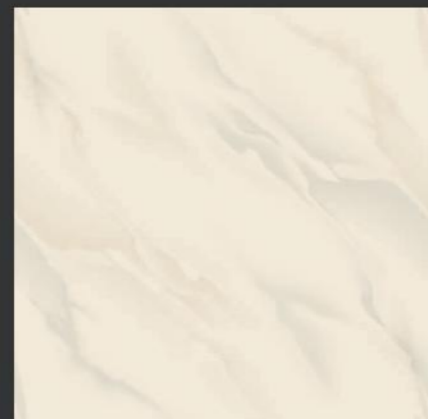

1064



Imperial
Impress your peers with the
dazzling sights of these enigmatic surface



1065




1068




1069



1072

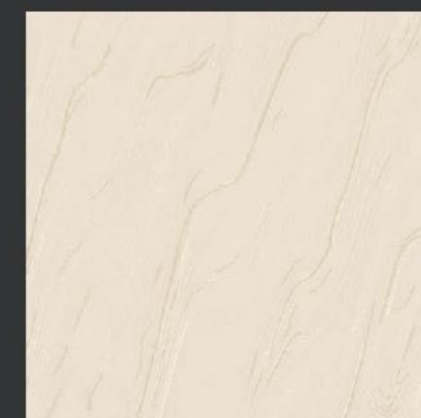

1075

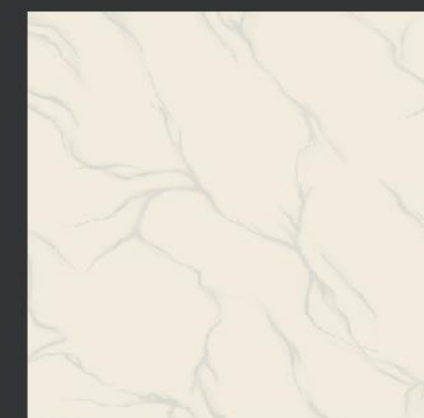

1081

Majestic

Invoke the feelings of grandeur and exclusivity in your surroundings

SST



1082



1083




1084




Dainty
Feel the elegance that transcends
into all aspects of your life



Armenis

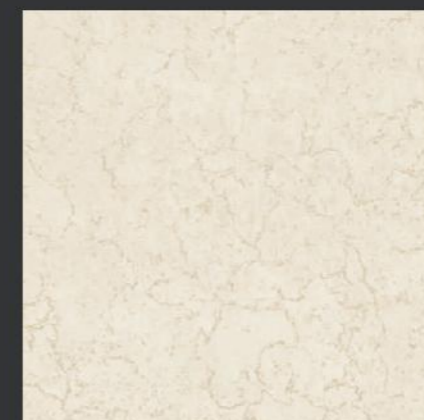


Botticino

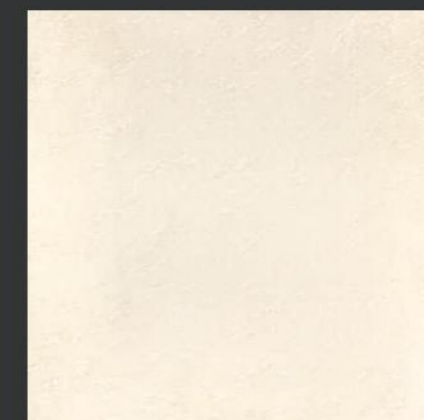


Crema Capri



Crema Marfil

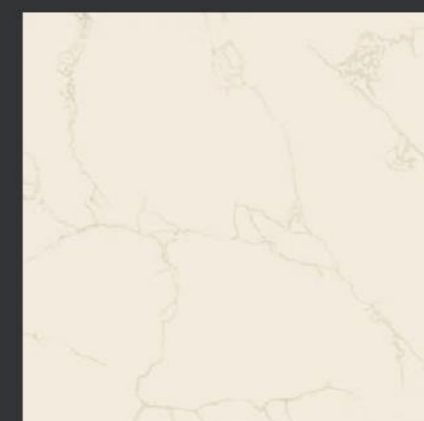

Embassy

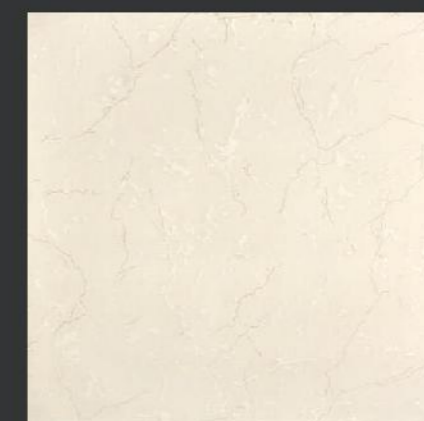

Perle



Luna




Orion Wooden



Trinity

Stately
Transform spaces into a
masterpiece of style and artistry

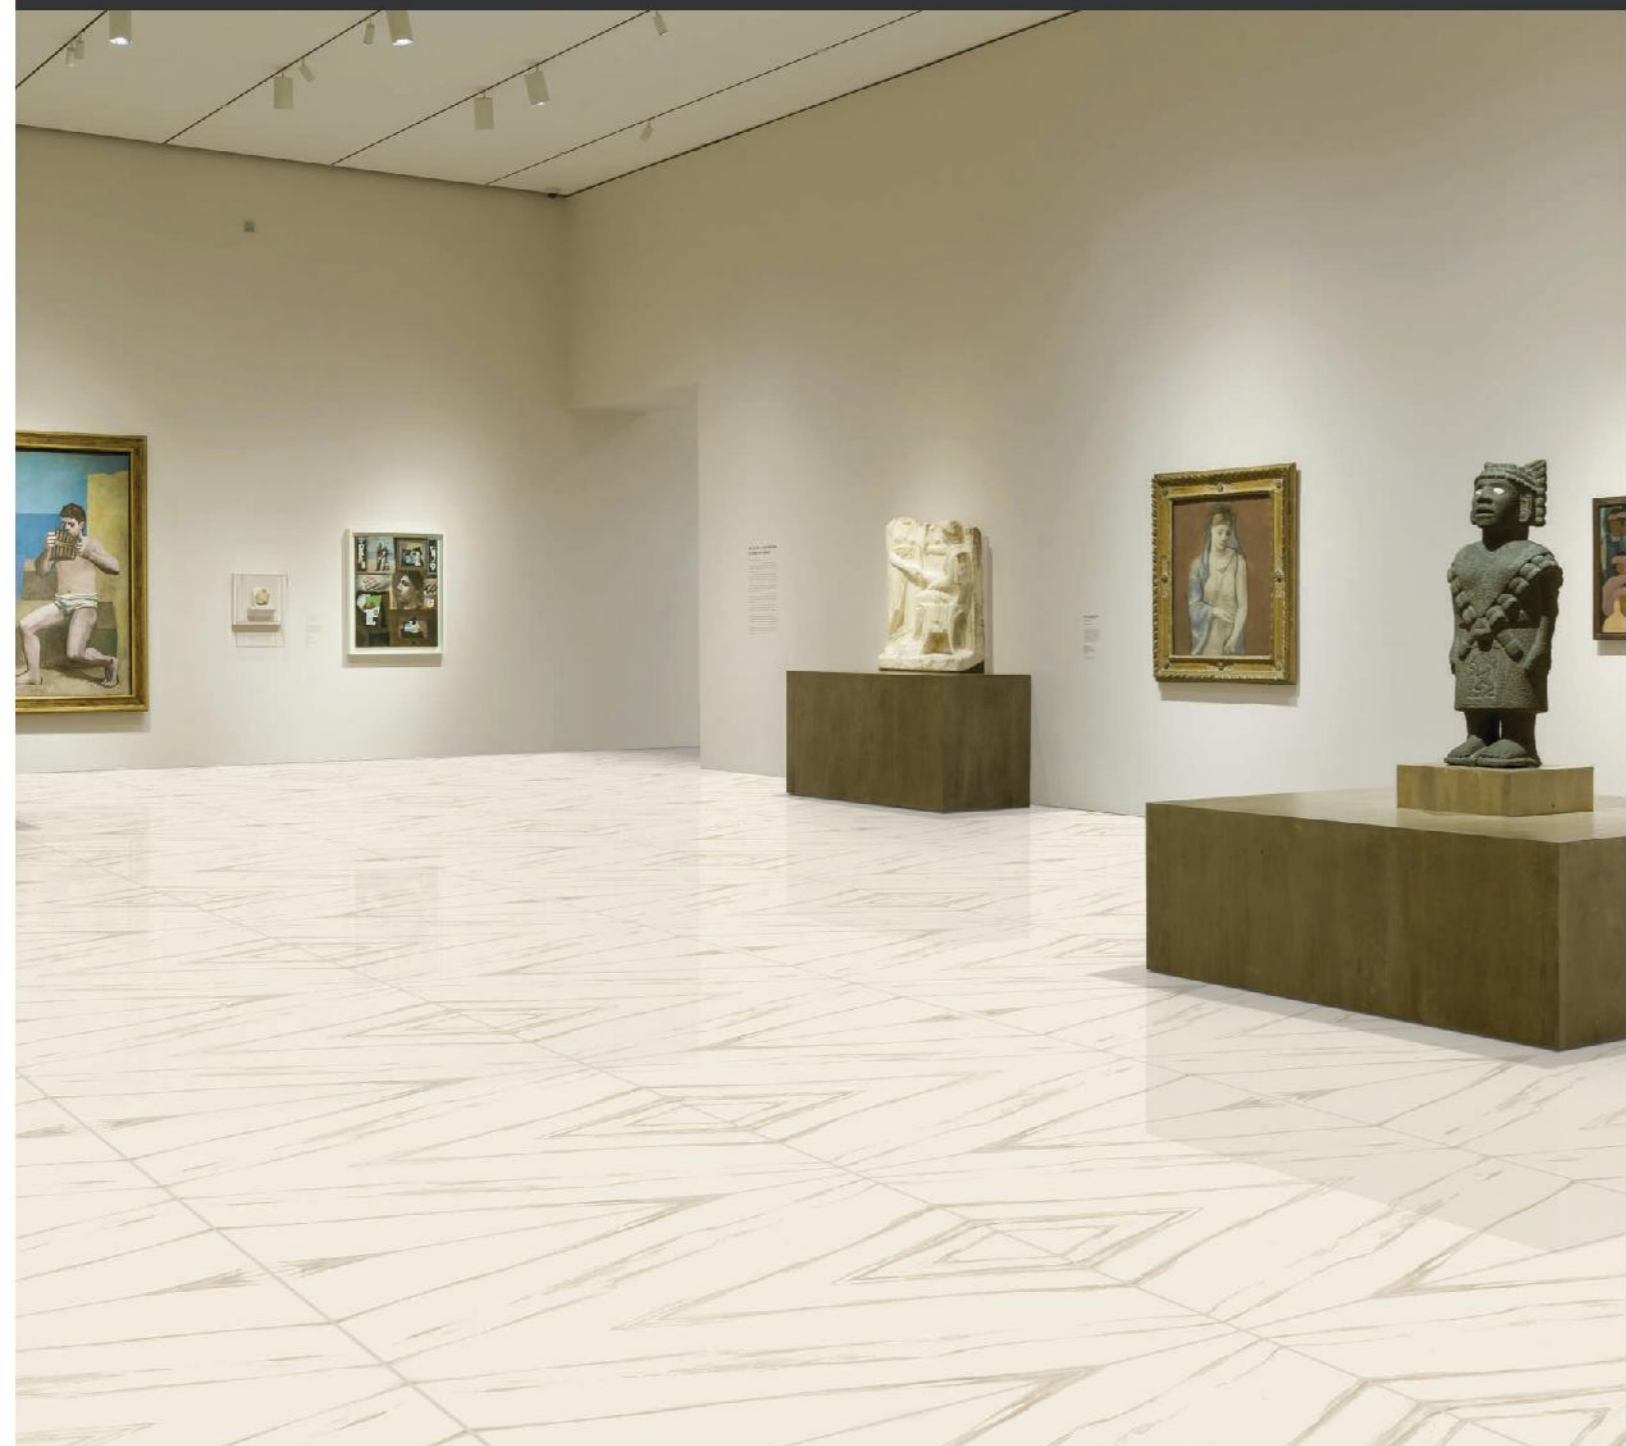

TECHNICAL SPECIFICATION

			Method of Testing	
1.	Deviation in Length	± 0.6%	± 0.1%	EN 98
2.	Deviation in Thickness	± 5%	± 4%	EN 98
3.	Straightness of Sides	± 0.5%	± 0.1%	EN 98
4.	Rectangularity	± 0.6%	± 0.2%	EN 98
5.	Surface Flatness	± 0.5%	± 0.3%	EN 98
6.	Water Absorption *	< 0.5%	± 0.05%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	> 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Resistance	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	-	Min. 65% - 70% reflection	Glossmeter

Packing Detail

Size	No. of Tiles/Box	Coverage Area
600x600mm	4 pcs.	1.44 sq.mt. / 15.5 sq.ft.

Lustrous

Embellish your abode with magnificent and glorious articles of modern vogue



Santosh Ceramic

National Highway - 8

Ajmer Road, 302026

Jaipur, Rajasthan

India

ceramicsantash@gmail.com

+91 90578 19391

+91 95880 80835